

CURRENT AND RESISTANCE

Conceptual Questions

30.1. You can use a compass placed beside the wire and observe the compass needle change direction when the battery is disconnected and then reconnected. So something must be happening in the wire. You can feel the heat emanating from the light bulb. You can use charged glass and plastic rods to find that charge does not accumulate at the light bulb. Energy is transferred somehow from the battery to the bulb. Some kind of charge carrier must flow through the wire.

30.2. (a) No, either flow could explain the observations we can make. A flow of positive charges in one direction through the circuit would “look the same” as a flow of negative charges in the opposite direction in terms of the observations we can make.

(b) Yes. Connect a conducting wire between the plates of a charged parallel plate capacitor. The capacitor will discharge as charges move through the wire from one plate to the other. The experiment provides evidence that the charge is carried as discrete particles. We can recharge the capacitor plates using glass and plastic rods and rubbing charges onto or off of the plates in discrete amounts.

30.3. The density of electrons is enormous so the mean time between collisions is very, very small. A huge number of collisions can carry energy very, very quickly, seemingly instantaneously.

30.4. No. The net electric field inside the wire is zero.

30.5. Current is the rate at which charge moves through a wire. Current density, J , is the current per square meter of cross section: $J = \frac{I}{A}$.

30.6. $I_a = I_d > I_b = I_c$ Conservation of current insures that the current into the top junction point, I_a , must equal the current out of that point $I_b + I_c$. Similarly at the bottom junction point $I_b + I_c = I_d$. Since the wires are identical, $I_b = I_c$.

30.7. $a > b = c$. Bulbs b and c are in series, thus the potential difference across each of them and current flowing through them is smaller than for bulb a .

30.8. $a = b = c$. All three bulbs are connected directly to the positive and negative terminals of the batteries so have the same potential difference across them, thus the same current and brightness.

30.9. (a) $I_1 = I_2$. Due to conservation of current, the current everywhere in the wire is the same. The number of charges passing per unit time must be the same in wires 1 and 2.

(b) By definition, $J_1 = \frac{I}{A_1}$ and $J_2 = \frac{I}{A_2}$. Since $A_1 < A_2$, $J_1 > J_2$.

(c) Since $\sigma_1 = \sigma_2 = \sigma$, $E_1 = \frac{J_1}{\sigma}$ and $E_2 = \frac{J_2}{\sigma}$. So $E_1 > E_2$.

(d) We have $J = nev_d$. Since $J_1 > J_2$, $(v_d)_1 > (v_d)_2$.

30.10. (a) Since $J = \frac{I}{A}$, when I is doubled, J is doubled.

(b) The conduction electron density is a property of the material, so it is unchanged.

(c) The mean time between collisions τ is a property of the material and is unchanged for a constant temperature.

(d) Since $J = nev_d$ and J is doubled but n and e are constants, v_d is also doubled.

30.11. $R_d > R_a = R_e > R_c > R_b$. Calculate $R = \frac{\rho L}{A}$:

$$\begin{aligned} R_a &= \frac{\rho L}{\pi r^2} & R_c &= \frac{\rho(2L)}{(\pi)(2r)^2} = \frac{1}{2}R_a \\ R_b &= \frac{\rho L}{(\pi)(2r)^2} = \frac{1}{4}R_a & R_d &= \frac{\rho(2L)}{\pi r^2} = 2R_a \\ R_e &= \frac{\rho(4L)}{(\pi)(2r)^2} = R_a \end{aligned}$$

30.12. (a) True. The chemical reactions in the electrolytes separate the positive and negative charges. This creates a potential difference. The charges flowing in the circuit have energy due to this potential difference.

(b) False. It is true that a battery is a source of potential difference. But the potential difference is always the same ONLY for an ideal battery. In a real battery there are energy losses in the battery itself so the terminal voltage is not always the same.

(c) False. The current leaving the battery depends upon the resistance in the circuit.

Exercises and Problems

Section 30.1 The Electron Current

30.1. Solve: Using Equation 30.3 and Table 30.1, the electron current is

$$i = nAv_d = (5.9 \times 10^{28} \text{ m}^{-3})\pi(0.5 \times 10^{-3} \text{ m})^2(5.0 \times 10^{-5} \text{ m/s}) = 2.3 \times 10^{18} \text{ s}^{-1}$$

The time for 1 mole of electrons to pass through a cross section of the wire is

$$t = \frac{N_A \times 1 \text{ mole}}{i} = \frac{6.02 \times 10^{23}}{2.3 \times 10^{18} \text{ s}^{-1}} = 2.62 \times 10^5 \text{ s} \approx 3.0 \text{ d}$$

Assess: The drift speed is small, and Avogadro's number is large. A time of the order of 3 days is reasonable.

30.2. Solve: The wire's cross-sectional area is $A = \pi r^2 = \pi(1.0 \times 10^{-3} \text{ m})^2 = 3.1415 \times 10^{-6} \text{ m}^2$, and the electron current through this wire is $i = \frac{N_e}{\Delta t} = 2.0 \times 10^{19} \text{ s}^{-1}$. Using Table 30.1 for the electron density of iron and Equation 30.3, the drift velocity is

$$v_d = \frac{i}{nA} = \frac{2.0 \times 10^{19} \text{ s}^{-1}}{(8.5 \times 10^{28} \text{ m}^{-3})(3.1415 \times 10^{-6} \text{ m}^2)} = 7.5 \times 10^{-5} \text{ m/s} = 75 \text{ } \mu\text{m/s}$$

Assess: The drift speed of electrons in metals is small.

30.3. Solve: The number of electrons crossing a cross-sectional area of a wire is the electron current i .

$$i = nAv_d = (6.0 \times 10^{28} \text{ m}^{-3}) \pi \left(\frac{1.6 \times 10^{-3} \text{ m}}{2} \right)^2 (2.0 \times 10^{-4} \text{ m/s}) = 2.4 \times 10^{19} \text{ s}^{-1}$$

The electron density n for aluminum is taken from Table 30.1. The number of electrons passing through the cross section in one day is

$$N_e = i\Delta t = (2.4 \times 10^{19} \text{ s}^{-1})(365 \text{ days})(24 \text{ hr/day})(3600 \text{ s/hr}) = 7.6 \times 10^{26} \text{ electrons}$$

Assess: The large electron density compensates for the small drift velocity to deliver a huge number of electrons in current.

30.4. Solve: Equation 30.2 is $N_e = nAv_d\Delta t$. Using Table 30.1 for the electron density, we get

$$A = \frac{\pi D^2}{4} = \frac{N_e}{nv_d\Delta t}$$

$$\Rightarrow D = \sqrt{\frac{4N_e}{\pi nv_d\Delta t}} = \sqrt{\frac{4(1.0 \times 10^{16})}{\pi(5.8 \times 10^{28} \text{ m}^{-3})(8.0 \times 10^{-4} \text{ m/s})(320 \times 10^{-6} \text{ s})}} = 9.3 \times 10^{-4} \text{ m} = 0.93 \text{ mm}$$

Section 30.2 Creating a Current

30.5. Model: Use the conduction model to relate the drift speed to the electric field strength.

Solve: From Equation 30.7, the electric field is

$$E = \frac{mv_d}{e\tau} = \frac{(9.11 \times 10^{-31} \text{ kg})(2.0 \times 10^{-4} \text{ m/s})}{(1.60 \times 10^{-19} \text{ C})(5.0 \times 10^{-14} \text{ s})} = 0.023 \text{ V/m}$$

30.6. Solve: (a) Each gold atom has one conduction electron. Using Avogadro's number and n as the number of moles, the number of atoms is

$$N = nN_A = \frac{m}{M_A} N_A = \frac{\rho V}{M_A} N_A = \frac{\rho(\pi r^2 L)}{M_A} N_A$$

The density of gold is $\rho = 19,300 \text{ kg/m}^3$, the atomic mass is $M_A = 197 \text{ g mol}^{-1}$, $r = 0.50 \times 10^{-3} \text{ m}$, $L = 0.10 \text{ m}$, and $N_A = 6.02 \times 10^{23} \text{ mol}^{-1}$. Substituting these values, we get $N = 4.6 \times 10^{21}$ electrons.

(b) If all the electrons are transferred a charge of $(4.6 \times 10^{21})(-1.60 \times 10^{-19} \text{ C}) = -740 \text{ C}$ will be delivered. To deliver a charge of -32 nC , however, the electrons within a length l have to be delivered. Thus,

$$l = \frac{-32 \times 10^{-9} \text{ C}}{-740 \text{ C}} (10 \text{ cm}) = 4.3 \times 10^{-10} \text{ cm} = 4.3 \times 10^{-12} \text{ m}$$

30.7. Model: We will use the model of conduction to relate the electric field strength to the mean free time between collisions.

Solve: From Equation 30.8, the electric field is

$$i = \frac{ne\tau A}{m} E = \frac{(8.5 \times 10^{28} \text{ m}^{-3})(1.6 \times 10^{-19} \text{ C})(4.2 \times 10^{-15} \text{ s})\pi(0.9 \times 10^{-3} \text{ m})^2}{(9.11 \times 10^{-31} \text{ kg})} 0.065 \text{ V/m} = 1.6 \times 10^{20} \text{ s}^{-1}$$

30.8. Solve: (a) The electron current is

$$i = nAv_d \Rightarrow v_d = \frac{i}{nA} = \frac{(3.5 \times 10^{17} \text{ s}^{-1})}{(6.0 \times 10^{28} \text{ m}^{-3})\pi(5.0 \times 10^{-4} \text{ m})^2}$$

$$= 7.43 \times 10^{-6} \text{ m/s}$$

The electron drift speed is 7.4×10^{-6} m/s. The electron density for aluminum is taken from Table 30.1.


(b) The electron drift velocity is related to the electric field in the wire by

$$v_d = \frac{e\tau}{m}E \Rightarrow \tau = \frac{mv_d}{eE} = \frac{(9.11 \times 10^{-31} \text{ kg})(7.43 \times 10^{-6} \text{ m/s})}{(1.6 \times 10^{-19} \text{ C})(2.0 \times 10^{-3} \text{ V/m})} = 2.1 \times 10^{-14} \text{ s}$$

Assess: This is about the right order of magnitude based on the examples in the text.

Section 30.3 Current and Current Density

30.9. Visualize:

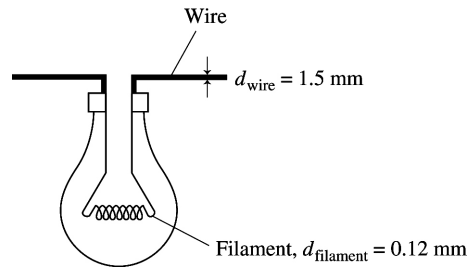

The current density J in a wire, as given by Equation 30.13, does not depend on the thickness of the wire.

Solve: (a) The current in the wire is

$$I_{\text{wire}} = J_{\text{wire}}A_{\text{wire}} = (4.5 \times 10^5 \text{ A/m}^2)\pi\left[\frac{1}{2}(1.5 \times 10^{-3} \text{ m})\right]^2 = 0.795 \text{ A}$$

Because current is continuous, $I_{\text{wire}} = I_{\text{filament}}$. Thus, $I_{\text{filament}} = 0.795 \text{ A} \approx 0.80 \text{ A}$.

(b) The current density in the filament is

$$J_{\text{filament}} = \frac{I_{\text{filament}}}{A_{\text{filament}}} = \frac{0.795 \text{ A}}{\pi\left[\frac{1}{2}(0.12 \times 10^{-3} \text{ m})\right]^2} = 7.0 \times 10^7 \text{ A/m}^2$$

30.10. Solve: (a) The current density is

$$J = \frac{I}{A} = \frac{I}{\pi R^2} = \frac{0.85 \text{ A}}{\pi\left[\frac{1}{2}(0.00025 \text{ m})\right]^2} = 1.7 \times 10^7 \text{ A/m}^2$$

(b) The electron current, or number of electrons per second, is

$$\frac{N_e}{\Delta t} = \frac{I}{e} = \frac{0.85 \text{ A}}{1.60 \times 10^{-19} \text{ C}} = \frac{0.85 \text{ C/s}}{1.60 \times 10^{-19} \text{ C}} = 5.3 \times 10^{18} \text{ s}^{-1}$$

30.11. Solve: From Equation 30.13, the current in the wire is

$$I = JA = (7.50 \times 10^5 \text{ A/m}^2)(2.5 \times 10^{-6} \text{ m} \times 75 \times 10^{-6} \text{ m}) = 0.141 \text{ mA}$$

The charge that flows in 15 min is the current times the time.

$$Q = I\Delta t = (0.141 \text{ A})(900 \text{ s}) = 127 \text{ C} \approx 130 \text{ C}$$

30.12. Visualize: The relationship between current, charge, and time is $I = \Delta Q/\Delta t$.

Solve: The current is $I = \Delta Q/\Delta t = 9.0 \times 10^{-12} \text{ C}/(5.0 \times 10^{-4} \text{ s}) = 1.8 \mu\text{A}$

Assess: We expect a small current due to very small flow of charge.

30.13. Solve: Equation 30.10 is $Q = I\Delta t$. The amount of charge delivered is

$$Q = (10.0 \text{ A}) \left(5.0 \text{ min} \times \frac{60 \text{ s}}{1 \text{ min}} \right) = 3.0 \times 10^3 \text{ C}$$


The number of electrons that flow through the hair dryer is

$$N = \frac{Q}{e} = \frac{3.0 \times 10^3 \text{ C}}{1.60 \times 10^{-19} \text{ C}} = 1.88 \times 10^{22}$$

30.14. Solve: From Equation 30.10,

$$I = \frac{Q}{\Delta t} = \frac{Ne}{\Delta t} = \frac{(2.0 \times 10^{13})(1.60 \times 10^{-19} \text{ C})}{1.0 \times 10^{-3} \text{ s}} = 0.0032 \text{ C/s} = 0.0032 \text{ A} = 3.2 \text{ mA}$$

30.15. Visualize:

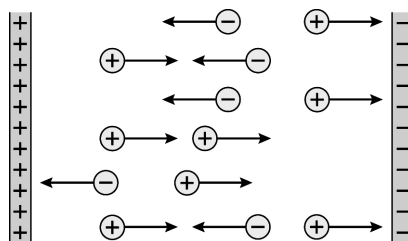

The direction of the current \vec{I} in a material is opposite to the direction of motion of the negative charges and is the same as the direction of motion of positive charges.

Solve: The charge due to positive ions moving to the right per second is

$$q_+ = N_+(2e) = (5.0 \times 10^{15})(2 \times 1.60 \times 10^{-19} \text{ C}) = 1.60 \times 10^{-3} \text{ C}$$


The charge due to negative ions moving to the left per second is

$$q_- = N(-e) = (6.0 \times 10^{15} \text{ s})(-1.60 \times 10^{-19} \text{ C}) = -0.96 \times 10^{-3} \text{ C}$$

Thus, the current in the solution is

$$i = \frac{q_+ - q_-}{t} = \frac{1.60 \times 10^{-3} \text{ C} - (-0.96 \times 10^{-3} \text{ C})}{1 \text{ s}} = 2.56 \times 10^{-3} \text{ A} = 2.6 \text{ mA}$$

30.16. Visualize:



Solve: The current-carrying cross section of the wire is

$$A = \pi r_1^2 - \pi r_2^2 = \pi[(0.0010 \text{ m})^2 - (0.0050 \text{ m})^2] = 2.356 \times 10^{-6} \text{ m}^2$$

The current density is

$$J = \frac{10 \text{ A}}{2.356 \times 10^{-6} \text{ m}^2} = 4.2 \times 10^6 \text{ A/m}^2$$

30.17. Solve: (a) The current density is

$$J = \frac{I}{A} = \frac{2.5 \text{ A}}{4.0 \times 10^{-6} \text{ m}^2} = 6.25 \times 10^5 \text{ A/m}^2 = 6.3 \times 10^5 \text{ A/m}^2$$

(b) Using Equation 30.13 and Table 30.1, the drift speed is

$$v_d = \frac{J}{ne} = \frac{6.25 \times 10^5 \text{ A/m}^2}{(6.0 \times 10^{28} \text{ m}^{-3})(1.6 \times 10^{-19} \text{ C})} = 6.5 \times 10^{-5} \text{ m/s}$$

Section 30.4 Conductivity and Resistivity

30.18. Model: Use the model of conduction to relate the mean time between collisions to conductivity.

Solve: From Equation 30.16, Table 30.1, and Table 30.2, the mean time between collisions for aluminum is

$$\tau_{\text{Al}} = \frac{m\sigma_{\text{Al}}}{n_{\text{Al}}e^2} = \frac{(9.11 \times 10^{-31} \text{ kg})(3.5 \times 10^7 \Omega^{-1}\text{m}^{-1})}{(6.0 \times 10^{28} \text{ m}^{-3})(1.60 \times 10^{-19} \text{ C})^2} = 2.1 \times 10^{-14} \text{ s}$$

Similarly, the mean time between collisions for iron is $\tau_{\text{iron}} = 4.2 \times 10^{-15} \text{ s}$.

Assess: The mean time between collisions in metals are of the order of 10^{-14} s .

30.19. Solve: The current density is $J = \sigma E$. Using Equation 30.17 and Table 30.2, the current in the wire is

$$I = \sigma EA = (3.5 \times 10^7 \Omega^{-1}\text{m}^{-1})(0.012 \text{ V/m})(4 \times 10^{-6} \text{ m}^2) = 1.68 \text{ A}$$

30.20. Model: Assume the battery is ideal.

Solve: (a) The electric field inside the wire is $E = \Delta V_{\text{wire}}/L$. Attaching the wire to the battery makes $\Delta V_{\text{wire}} = \Delta V_{\text{bat}} = 1.5 \text{ V}$. Thus,

$$E = \frac{1.5 \text{ V}}{0.15 \text{ m}} = 10 \text{ V/m}$$

(b) Using Table 30.2, the current density is

$$J = \sigma E = \frac{E}{\rho} = \frac{10 \text{ V/m}}{1.5 \times 10^{-6} \Omega \text{ m}} = 6.7 \times 10^6 \text{ A/m}^2$$

(c) The current in a wire is related to the potential difference by $I = \Delta V_{\text{wire}}/R$. Thus,

$$R = \frac{\Delta V_{\text{wire}}}{I} = \frac{1.5 \text{ V}}{2 \text{ A}} = 0.75 \Omega$$

The resistance is related to the wire's geometry by

$$R = \frac{\rho L}{A} = \frac{\rho L}{\pi r^2} \Rightarrow r = \sqrt{\frac{\rho L}{\pi R}} = \sqrt{\frac{(1.5 \times 10^{-6} \Omega \text{ m})(0.15 \text{ m})}{\pi(0.75 \Omega)}} = 3.1 \times 10^{-4} \text{ m} = 0.31 \text{ mm}$$

Thus, the wire's diameter is $d = 2r = 0.62 \text{ mm}$.

30.21. Solve: From Equations 30.17 and 30.18, the resistivity is

$$\rho = \frac{E}{J} = \frac{E}{I/A} = \frac{EA}{I} = \frac{E\pi r^2}{I} = \frac{(0.085 \text{ V/m})\pi(1.5 \times 10^{-3} \text{ m})^2}{12 \text{ A}} = 5.0 \times 10^{-8} \Omega \text{ m}$$

30.22. Solve: From Equations 30.17 and 30.18, the resistivity is

$$\rho = \frac{E}{J} = \frac{E}{I/A} = \frac{EA}{I} = \frac{E\pi r^2}{I} = \frac{(0.0075 \text{ V/m})\pi(0.50 \times 10^{-3} \text{ m})^2}{3.9 \times 10^{-3} \text{ A}} = 1.51 \times 10^{-6} \Omega \text{ m}$$

From Table 30.2, we see that the wire is made of nichrome.

30.23. Solve: (a) Since $J = \sigma E$ and $J = I/A$, the electric field is

$$E = \frac{I}{\sigma A} = \frac{I}{\pi r^2 \sigma} = \frac{0.020 \text{ A}}{\pi(0.25 \times 10^{-3} \text{ m})^2(6.2 \times 10^7 \Omega^{-1} \text{ m}^{-1})} = 1.64 \times 10^{-3} \text{ V/m}$$

(b) Since the current density is related to v_d by $J = I/A = nev_d$, the drift speed is

$$v_d = \frac{I}{\pi r^2 ne} = \frac{0.020 \text{ A}}{\pi(0.25 \times 10^{-3} \text{ m})^2(5.8 \times 10^{28} \text{ m}^{-3})(1.60 \times 10^{-19} \text{ C})} = 1.10 \times 10^{-5} \text{ m/s}$$

Assess: The values of n and σ for silver have been taken from Table 30.1 and Table 30.2. The drift velocity is typical of metals.


30.24. Model: Because current is conserved, the currents in the two segments of the wire are the same.

Solve: The currents in the two segments of the wire are related by $I_1 = I_2 = I$. But $I = AJ$, so we have $A_1 J_1 = A_2 J_2$.

The wire's diameter is constant, so $J_1 = J_2$ and $\sigma_1 E_1 = \sigma_2 E_2$. The ratio of the electric fields is

$$\frac{E_2}{E_1} = \frac{\sigma_1}{\sigma_2} = \frac{1}{\sigma_2/\sigma_1} = \frac{1}{2}$$

30.25. Visualize:



1 cm × 1 cm × 1 cm block

Solve: The current density through the cube is $J = \sigma E$, and the actual current is $I = AJ$. Combining these equations, the conductivity is

$$\sigma = \frac{I}{AE} = \frac{9.0 \text{ A}}{(10^{-4} \text{ m}^2)(5.0 \times 10^{-3} \text{ V/m})} = 1.80 \times 10^7 \Omega^{-1} \text{ m}^{-1}$$

If *all* quantities entering the calculation are in SI units then the result for σ has to be in SI units. From the value for σ , we can identify the metal as being tungsten.

30.5 Resistance and Ohm's Law

30.26. Model: Assume the battery is ideal.

Solve: (a) Because the battery provides a current of 0.50 A and the current is defined as the amount of charge that passes through a cross section per second, the charge lifted by the escalator is 0.50 C/s.

(b) The work done by the escalator in lifting charge Q is

$$W = U = Q\Delta V = (1.0 \text{ C})(1.5 \text{ V}) = 1.5 \text{ J}$$

(c) The power output of the charge escalator is the work done by the escalator per unit time:

$$P = \frac{W}{\Delta t} = \frac{\Delta U}{\Delta t} = \frac{Q\Delta V}{\Delta t} = I\Delta V = (0.50 \text{ A})(1.5 \text{ V}) = 0.75 \text{ W}$$

30.27. Solve: (a) Resistivity depends only on the type of material, not the geometry of the wire. Wires 1 and 2 are made of the same material, so $\rho_2 = \rho_1$ and thus $\rho_2/\rho_1 = 1.00$.

(b) The resistance of a wire of length L and radius r is given by Equation 30.22:

$$R = \frac{\rho L}{A} = \frac{\rho L}{\pi r^2}$$

Because the two wires have the same resistivity,

$$\frac{R_2}{R_1} = \frac{\rho L_2 / \pi r_2^2}{\rho L_1 / \pi r_1^2} = \left(\frac{r_1}{r_2}\right)^2 \frac{L_2}{L_1} = \left(\frac{1}{2}\right)^2 \frac{2}{1} = \frac{1}{2} = 0.50$$

30.28. Solve: (a) Using Table 30.2 and Equation 30.22, the resistance is

$$R = \frac{\rho L}{A} = \frac{\rho L}{\pi r^2} = \frac{(2.4 \times 10^{-8} \Omega \text{ m})(2.0 \text{ m})}{\pi(1.0 \times 10^{-4} \text{ m})^2} = 1.5 \Omega$$

(b) The resistance is

$$R = \frac{\rho L}{A} = \frac{\rho L}{d^2} = \frac{(3.5 \times 10^{-5} \Omega \text{ m})(0.10 \text{ m})}{(0.0010 \text{ m})^2} = 3.5 \Omega$$

30.29. Solve: We can identify the material by its resistivity. Starting with the wire's resistance,

$$R = \frac{\rho L}{A} = \frac{\rho L}{\pi r^2} \Rightarrow \rho = \frac{\pi r^2 R}{L} = \frac{\pi(0.0004 \text{ m})^2(1.1 \Omega)}{10 \text{ m}} = 5.5 \times 10^{-8} \Omega \text{ m}$$

From Table 30.2, we can identify the wire as being made of tungsten.

30.30. Model: Assume the battery is an ideal battery.

Solve: Connecting the wire to the battery leads to an electric field inside the wire that is given by Equation 30.19:

$$E_{\text{wire}} = \frac{\Delta V_{\text{wire}}}{L} \Rightarrow \Delta V_{\text{wire}} = LE_{\text{wire}} = (0.30 \text{ m})(5.0 \times 10^{-13} \text{ V/m}) = 1.5 \times 10^{-13} \text{ V} = 1.5 \text{ mV}$$

30.31. Model: Assume the battery is an ideal battery.

Solve: (a) The current in a wire is related to its resistance R and to the potential difference ΔV_{wire} between the ends of the wire as

$$I = \frac{\Delta V_{\text{wire}}}{R} \Rightarrow R = \frac{\Delta V_{\text{wire}}}{I} = \frac{1.5 \text{ V}}{0.50 \text{ A}} = 3.0 \Omega$$

From Equation 30.22,

$$R = \frac{\rho L}{A} \Rightarrow L = \frac{RA}{\rho} = \frac{(3.0 \Omega)\pi(0.30 \times 10^{-3} \text{ m})^2}{2.8 \times 10^{-8} \Omega \text{ m}} = 30 \text{ m}$$

(b) For a uniform wire of the same material, $R \propto L$. If the wire in this problem is cut in half, its resistance will decrease to $\frac{1}{2}(3 \Omega) = 1.5 \Omega$. Thus, using $I = \Delta V_{\text{wire}}/R$, we have $I = 1.0 \text{ A}$.

30.32. Model: Assume the battery is an ideal battery.

Solve: We can find the current I from Equation 30.23 provided we know the resistance R of the gold wire. From Equation 30.22 and Table 30.2, the resistance of the wire is

$$R = \frac{\rho L}{A} = \frac{\rho L}{\pi r^2} = \frac{(2.4 \times 10^{-8} \Omega \text{ m})(100 \text{ m})}{\pi(0.050 \times 10^{-3} \text{ m})^2} = 305.6 \Omega \Rightarrow I = \frac{\Delta V_{\text{wire}}}{R} = \frac{0.70 \text{ V}}{305.6 \Omega} = 2.3 \text{ mA}$$

30.33. Model: The resistance of a “resistor” (the blood-filled artery in this case) is given by $R = L/\sigma A$.

We are asked for the resistances of the blood itself, so we ignore the artery walls.

Visualize: We are given $L = 0.20 \text{ m}$ and $A = \pi r^2 = \pi(d/2)^2 = \pi(0.0050 \text{ m})^2 = 7.85 \times 10^{-5} \text{ m}^2$.

Solve:

$$R = \frac{L}{\sigma A} = \frac{(0.20 \text{ m})}{(0.63 \Omega^{-1} \cdot \text{m}^{-1})(7.85 \times 10^{-5} \text{ m}^2)} = 4100 \Omega$$

Assess: 4100Ω is a reasonable value of resistance, neither extremely large nor extremely small. The value of the conductivity of blood is also neither extremely large nor extremely small, so we are satisfied with our answer.

30.34. Solve: From Table 30.2, the resistivity of carbon is $\rho = 3.5 \times 10^{-5} \Omega \text{ m}$. From Equation 30.22, the resistance of lead from a mechanical pencil is

$$R = \frac{\rho L}{A} = \frac{\rho L}{\pi r^2} = \frac{(3.5 \times 10^{-5} \Omega \text{ m})(0.060 \text{ m})}{\pi(0.35 \times 10^{-3} \text{ m})^2} = 5.5 \Omega$$

Now apply Ohm’s law:

$$I = \frac{\Delta V}{R} = \frac{9.0 \text{ V}}{5.5 \Omega} = 1.6 \text{ A}$$

Assess: 1.6 A is a pretty good current. The lead might warm up.

30.35. Solve: From Table 30.2, the resistivity of aluminum is $\rho = 2.8 \times 10^{-8} \Omega \cdot \text{m}$. From Equation 30.22, the length L of a wire with a cross-sectional area A and having a resistance R is

$$L = \frac{AR}{\rho} = \frac{(10 \times 10^{-6} \text{ m})^2 (1000 \Omega)}{2.8 \times 10^{-8} \Omega \cdot \text{m}} = 3.57 \text{ m}$$

The number of turns is the length of the wire divided by the circumference of one turn. Thus,

$$\frac{3.57 \text{ m}}{2\pi(1.5 \times 10^{-3} \text{ m})} = 380$$

30.36. Solve: The slope of the I versus ΔV graph, according to Ohm's law, is the inverse of the resistance R . From the graph in Figure EX30.36, the slope of the material is

$$\frac{\Delta V}{I} = \frac{100 \text{ V}}{2 \text{ A}} = 50 \Omega$$

30.37. Solve: We need an aluminum wire whose resistance and length are the same as that of a 0.50-mm-diameter copper wire. That is,

$$\begin{aligned} R_{\text{Cu}} = \frac{\rho_{\text{Cu}} L}{A_{\text{Cu}}} = R_{\text{Al}} = \frac{\rho_{\text{Al}} L}{A_{\text{Al}}} &\Rightarrow A_{\text{Al}} = \left(\frac{\rho_{\text{Al}}}{\rho_{\text{Cu}}} \right) A_{\text{Cu}} \Rightarrow \pi r_{\text{Al}}^2 = \left(\frac{\rho_{\text{Al}}}{\rho_{\text{Cu}}} \right) \pi r_{\text{Cu}}^2 \\ \Rightarrow r_{\text{Al}} = \sqrt{\frac{\rho_{\text{Al}}}{\rho_{\text{Cu}}}} r_{\text{Cu}} &= \sqrt{\frac{2.8 \times 10^{-8} \Omega \cdot \text{m}}{1.7 \times 10^{-8} \Omega \cdot \text{m}}} (0.25 \text{ mm}) = 0.32 \text{ mm} \end{aligned}$$

We need a 0.64-mm-diameter aluminum wire.

30.38. Solve: Equation 30.17 will be used to relate electric field strength with the diameter. We have

$$J = \frac{I}{A} = \frac{I}{\frac{1}{4}\pi D^2} = \frac{4I}{\pi D^2} = \sigma E \Rightarrow I = \frac{\sigma \pi E D^2}{4}$$

Because the current is the same in the two wires,

$$E_{\text{nichrome}} = \left(\frac{\sigma_{\text{aluminum}}}{\sigma_{\text{nichrome}}} \right) \left(\frac{D_{\text{aluminum}}}{D_{\text{nichrome}}} \right)^2 E_{\text{aluminum}}$$


Using the values of σ from Table 30.2,

$$E_{\text{nichrome}} = \left(\frac{3.5 \times 10^7 \Omega^{-1} \text{ m}^{-1}}{6.7 \times 10^5 \Omega^{-1} \text{ m}^{-1}} \right) \left(\frac{1.0 \text{ mm}}{2.0 \text{ mm}} \right)^2 (0.0080 \text{ V/m}) = 0.104 \text{ V/m} \approx 0.10 \text{ V/m}$$

30.39. Model: We will not initially assume the material is ohmic; this is what we are trying to find out.

Visualize: If an object (resistor) is ohmic then a graph of I vs. ΔV will be linear and the slope will be $1/R$. The cross-sectional area $A = (1.0 \times 10^{-3} \text{ m}) \times (0.50 \times 10^{-3} \text{ m}) = 0.50 \times 10^{-6} \text{ m}^2$.

Solve:

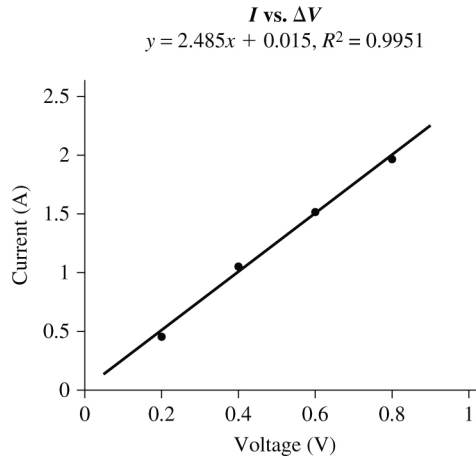

We see from the graph that the linear fit is excellent and the slope is 2.485 A/V. The intercept is also very small, which agrees with our hypothesis that the two variables are directly proportional (and linearly related), so we proceed to compute the conductivity. From $R = \rho L/A$ and $\sigma = 1/\rho$ we get

$$\text{slope} = \frac{1}{R} = \frac{\sigma A}{L}$$

Solve for σ :

$$\sigma = \frac{(\text{slope})(L)}{A} = \frac{(2.485 \text{ A/V})(45 \times 10^{-3} \text{ m})}{0.50 \times 10^{-6} \text{ m}^2} = 2.2 \times 10^5 \text{ } \Omega^{-1} \text{ m}^{-1}$$

Assess: The material is ohmic, but not a particularly great conductor since the conductivity is a couple of orders less than the metal conductors in the table.

30.40. Solve: (a) The moving electrons are a current, even though they're not confined inside a wire. The electron current is

$$\frac{N_e}{\Delta t} = \frac{I}{e} = \frac{50 \times 10^{-6} \text{ A}}{1.60 \times 10^{-19} \text{ C}} = 3.1 \times 10^{14} \text{ s}^{-1}$$

This means during the time interval $\Delta t = 1 \text{ s}$, 3.1×10^{14} electrons strike the screen.

(b) The current density is

$$J = \frac{I}{A} = \frac{I}{\pi r^2} = \frac{50 \times 10^{-6} \text{ A}}{\pi (0.00020 \text{ m})^2} = 4.0 \times 10^2 \text{ A/m}^2$$

(c) The acceleration can be found from kinematics:

$$v_1^2 = (4.0 \times 10^7 \text{ m/s})^2 = v_0^2 + 2a\Delta x = 2a\Delta x \Rightarrow a = \frac{(4.0 \times 10^7 \text{ m/s})^2}{2(5.0 \times 10^{-3} \text{ m})} = 1.60 \times 10^{17} \text{ m/s}^2$$

But the acceleration is $a = F/m = eE/m$. Consequently, the electric field must be

$$E = \frac{ma}{e} = \frac{(9.11 \times 10^{-31} \text{ kg})(1.60 \times 10^{17} \text{ m/s}^2)}{1.6 \times 10^{-19} \text{ C}} = 9.1 \times 10^5 \text{ V/m}$$

(d) When they strike the screen, each electron has a kinetic energy

$$K = \frac{1}{2}mv_1^2 = \frac{1}{2}(9.11 \times 10^{-31} \text{ kg})(4.0 \times 10^7 \text{ m/s}) = 7.288 \times 10^{-16} \text{ J}$$

Power is the *rate* at which the screen absorbs this energy. The power of the beam is

$$P = \frac{\Delta E}{\Delta t} = K \frac{N_e}{\Delta t} = (7.288 \times 10^{-16} \text{ J})(3.1 \times 10^{14} \text{ s}^{-1}) = 0.23 \text{ J/s} = 0.23 \text{ W}$$

Assess: Power delivered to the screen by the electron beam is reasonable because the screen over time becomes a little warm.

30.41. Solve: (a) The current associated with the moving film is the rate at which the charge on the film moves past a certain point. The tangential speed of the film is

$$v = \omega r = (90 \text{ rpm})(4.0 \text{ cm}) = 90 \frac{\text{rev}}{\text{min}} \times \frac{1 \text{ min}}{60 \text{ s}} \times \frac{2\pi \text{ rad}}{1 \text{ rev}} \times 1.0 \text{ cm} = 9.425 \text{ cm/s}$$

In 1.0 s the film moves a distance of 9.425 cm. This means the area of the film that moves to the right in 1.0 s is $(9.425 \text{ cm})(4.0 \text{ cm}) = 37.7 \text{ cm}^2$. The amount of charge that passes to the right in 1.0 s is

$$Q = (37.7 \text{ cm}^2)(-2.0 \times 10^{-9} \text{ C/cm}^2) = -75.4 \times 10^{-9} \text{ C}$$

Since $I = Q/\Delta t$, we have

$$I = \frac{|-(75.4 \times 10^{-9} \text{ C})|}{1 \text{ s}} = 75.4 \text{ nA}$$

The current is 75 nA.

(b) Having found the current in part (a), we can once again use $I = Q/\Delta t$ to obtain Δt :

$$\Delta t = \frac{Q}{I} = \frac{|-10 \times 10^{-6} \text{ C}|}{75.4 \times 10^{-9} \text{ A}} = 133 \text{ s} \approx 130 \text{ s}$$

30.42. Model: The current is the rate at which the charge of the ions moves through the ionic solution.

Solve: Because the atomic mass of gold is 197 g, the number of gold atoms is

$$N = \frac{M}{M_A} N_A = \left(\frac{0.50 \text{ g}}{197 \text{ g mol}^{-1}} \right) 6.02 \times 10^{23} \text{ mol}^{-1} = 1.53 \times 10^{21} \text{ atoms}$$

We need to deposit $N = 1.53 \times 10^{21}$ gold ions, each with a charge of $-1.60 \times 10^{-19} \text{ C}$, in 3.0 hours on the statue. The current is

$$I = \frac{Q}{\Delta t} = \frac{(1.53 \times 10^{21})(1.60 \times 10^{-19} \text{ C})}{3.0 \times 3600 \text{ s}} = 23 \text{ mA}$$

30.43. Model: Current is the rate at which the charge moves across a certain cross section.

Solve: (a) For the circular motion of the electron around the proton, Coulomb's force between the electron and the proton causes the centripetal acceleration. Thus,

$$\frac{1}{4\pi\epsilon_0} \frac{|-e|e}{r^2} = \frac{mv^2}{r} = \frac{m}{r} \left(\frac{2\pi r}{T} \right)^2 \Rightarrow \frac{1}{T} = f = \sqrt{\frac{(9.0 \times 10^9 \text{ N m}^2/\text{C}^2)(1.60 \times 10^{-19} \text{ C})^2}{4\pi^2 (0.053 \times 10^{-9} \text{ m})^3 (9.11 \times 10^{-31} \text{ kg})}} = 6.56 \times 10^{15} \text{ Hz}$$

The frequency is $6.6 \times 10^{15} \text{ Hz}$.

(b) Charge $Q = e$ passes any point on the orbit once every period. Thus the effective current is

$$I = \frac{Q}{\Delta t} = \frac{e}{T} = ef = (1.6 \times 10^{-19} \text{ C})(6.56 \times 10^{15} \text{ Hz}) = 1.05 \times 10^{-3} \text{ A}$$

30.44. Solve: (a) A current of 1.8 pA for the potassium ions means that a charge of 1.8 pC flows through the potassium ion channel per second. The number of potassium ions that pass through the ion channel per second is

$$\frac{1.8 \times 10^{-12} \text{ C/s}}{1.6 \times 10^{-19} \text{ C}} = 1.125 \times 10^7 \text{ s}^{-1}$$

Since the channel opens only for 1.0 ms, the total number of potassium ions that pass through the channel is $(1.125 \times 10^7 \text{ s}^{-1})(1.0 \times 10^{-3} \text{ s}) = 1.13 \times 10^4$ atoms.

(b) The current density in the ion channel is

$$J = \frac{I}{A} = \frac{1.8 \text{ pA}}{\pi(0.30 \text{ nm}/2)^2} = \frac{1.8 \times 10^{-12} \text{ A}}{\pi(0.15 \times 10^{-9} \text{ m})^2} = 2.5 \times 10^7 \text{ A/m}^2$$

30.45. Solve: (a) Current is defined as $I = Q/\Delta t$, so the charge delivered in time Δt is

$$Q = I\Delta t = (150 \text{ A})(0.80 \text{ s}) = 120 \text{ C}$$

(b) The drift speed is

$$v_d = \frac{J}{ne} = \frac{I/A}{ne} = \frac{I}{\pi r^2 ne} = \frac{150 \text{ A}}{\pi(0.0025 \text{ m})^2(8.5 \times 10^{28} \text{ m}^{-3})(1.60 \times 10^{-19} \text{ C})} = 5.617 \times 10^{-4} \text{ m/s}$$

At this speed the electrons drift a distance

$$d = (5.617 \times 10^{-4} \text{ m/s})(0.80 \text{ s}) = 4.49 \times 10^{-4} \text{ m} = 0.45 \text{ mm}$$

30.46. Solve: The total charge in the battery is

$$Q = I\Delta t = (90 \text{ A})(3600 \text{ s}) = 3.2 \times 10^5 \text{ C}$$

30.47. Model: We assume that Ohm's law applies to the situation.

$$I = \frac{\Delta V}{R}$$

We also use Equation 30.22, which gives R in terms of ρ , L , and A .

$$R = \frac{\rho L}{A}$$

Visualize: We are given that $\Delta V = 9.0 \text{ V}$, $L = 0.050 \text{ m}$, $I = 230 \mu\text{A}$, and $A = \pi r^2 = \pi(d/2)^2 = \pi(1.5 \text{ mm}/2)^2 = 1.77 \times 10^{-6} \text{ m}^2$.

Solve: Combine the two previous equations.

$$\rho = \frac{RA}{L} = \frac{\Delta V}{I} \frac{A}{L} = \frac{(9.0 \text{ V})(1.77 \times 10^{-6} \text{ m}^2)}{(230 \times 10^{-6} \text{ A})(0.050 \text{ m})} = 1.4 \Omega \cdot \text{m}$$

Assess: This resistivity is close to the value for blood ($1.6 \Omega \cdot \text{m}$) found in references.

30.48. Model: The resistance of a wire is related to its resistivity, length, and cross-sectional area by $R = \rho L/A$. The area of a wire is related to its diameter by $A = \pi d^2/4$. The potential drop across a resistor is related to the resistance of the resistor and the current through the resistor by $\Delta V = IR$.

Solve: (a) The resistance between the hands is

$$R = \rho L/A = \rho L/(\pi d^2/4) = 4\rho L/(\pi d^2) = 4(5.0 \Omega \cdot \text{m})(1.6 \text{ m})/(\pi(0.10 \text{ m})^2) = 1.0 \times 10^3 \Omega$$

(b) The potential difference across a resistor of this size when there is a current of 100 mA is

$$\Delta V = IR = (0.10 \text{ A})(1.02 \times 10^3 \Omega) = 100 \text{ V}$$


Assess: This result tells us that a potential difference of 100 V can cause lethal currents when your skin is wet. This should give you new respect for the potential difference at all of your electrical outlets.

30.49. Solve: Equation 30.13 defines the current density as $J = I/A$. This means

$$A = \frac{\pi D^2}{4} = \frac{I}{J} \Rightarrow D = \sqrt{\frac{4I}{\pi J}} = \sqrt{\frac{4(1.0 \text{ A})}{\pi(500 \text{ A/cm}^2)}} = 0.050 \text{ cm} = 0.50 \text{ mm}$$

Assess: Fuse wires are usually thin.

30.50. Visualize:

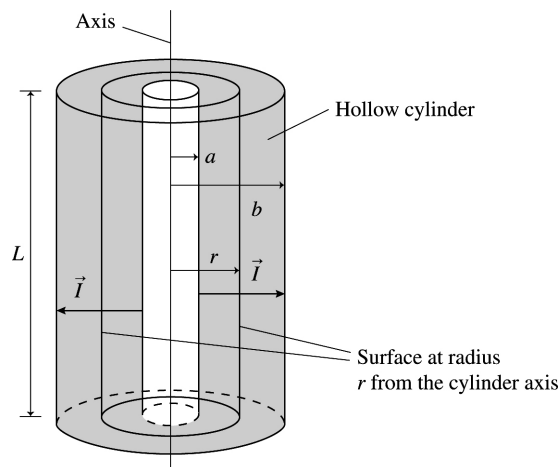

Solve: (a) Consider a cylindrical surface inside the metal at a radial distance r from the center. The current is flowing through the walls of this cylinder, which have surface area $A = (2\pi r)L$. Thus

$$I = JA = \sigma E(2\pi r)L$$

Thus the electric field strength at radius r is


$$E = \frac{I}{2\pi\sigma Lr}$$

(b) For iron, with $\sigma = 1.0 \times 10^7 \Omega^{-1} \text{ m}^{-1}$,

$$E_{\text{inner}} = \left(\frac{25 \text{ A}}{2\pi(0.10 \text{ m})(1.0 \times 10^7 \Omega^{-1} \text{ m}^{-1})} \right) \left(\frac{1}{0.010 \text{ m}} \right) = 4.0 \times 10^{-4} \text{ V/m}$$

$$E_{\text{outer}} = \left(\frac{25 \text{ A}}{2\pi(0.10 \text{ m})(1.0 \times 10^7 \Omega^{-1} \text{ m}^{-1})} \right) \left(\frac{1}{0.025 \text{ m}} \right) = 1.59 \times 10^{-4} \text{ V/m}$$

30.51. Visualize:



Hollow sphere

Solve: (a) Consider a spherical surface inside the hollow sphere at a radial distance r from the center. The current is flowing outward through this surface, which has surface area $A = 4\pi r^2$. Thus

$$I = JA = \sigma E(4\pi r^2)$$

Thus the electric field strength at radius r is

$$E = \frac{I}{4\pi\sigma r^2}$$

(b) For copper, with $\sigma = 1.0 \times 10^7 \Omega^{-1} \text{ m}^{-1}$,


$$E_{\text{inner}} = \frac{25 \text{ A}}{4\pi(6.0 \times 10^7 \Omega^{-1} \text{ m}^{-1})(0.010 \text{ m})^2} = 3.3 \times 10^{-4} \text{ V/m}$$

$$E_{\text{outer}} = \frac{25 \text{ A}}{4\pi(6.0 \times 10^7 \Omega^{-1} \text{ m}^{-1})(0.025 \text{ m})^2} = 5.3 \times 10^{-5} \text{ N/C}$$

30.52. Solve: (a) Since $I = \Delta Q/\Delta t$, for infinitesimal changes

$$I = \frac{dQ}{dt} = \frac{d}{dt}(4t - t^2) = 4 - 2t$$

(b)

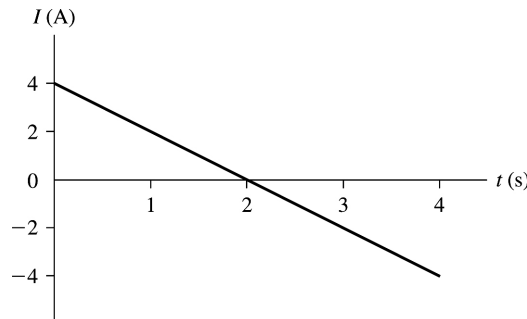


30.53. Solve: (a) Since $I = \Delta Q/\Delta t$, for infinitesimal changes

$$I = \frac{dQ}{dt} = \frac{d}{dt}(20 \text{ C})(1 - e^{-t/2.0 \text{ s}}) = (20 \text{ C})(-e^{-t/2.0 \text{ s}})(-1/2.0 \text{ s}) = (10 \text{ A})e^{-t/2.0 \text{ s}}$$

(b) The maximum value of the current occurs at $t = 0 \text{ s}$ and is 10 A.

(c) The values of I (A) for selected values of t are

t (s)	0	1	2	4	6	8	10
I (A)	10	6.07	3.68	1.35	0.50	0.18	0.07

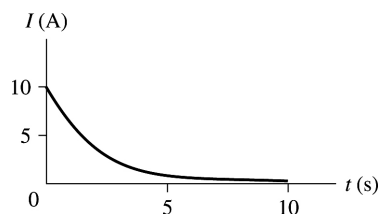


30.54. Solve: (a) Because $I = dQ/dt$,

$$Q = \int I dt = \int_0^t (2.0 \text{ A}) e^{-t/(2.0 \mu\text{s})} dt = \left[(-4.0 \text{ A } \mu\text{s}) e^{-t/(2.0 \mu\text{s})} \right]_0^t = (4.0 \mu\text{C}) \left[1 - e^{-t/(2.0 \mu\text{s})} \right]$$

where we have used the condition $Q = 0 \text{ C}$ at $t = 0 \mu\text{s}$.

(b) The values of Q (μC) for selected values of t are

t (μs)	0	1	2	4	6	8	10
Q (μC)	0	1.57	2.52	3.46	3.80	3.92	3.98

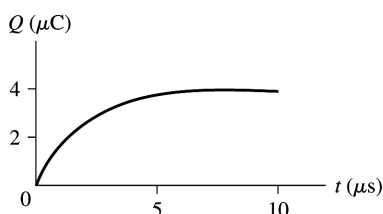

30.55. Model: Because current is conserved, the current flowing in the 2.0-mm-diameter segment of the wire is the same as in the 1.0-mm-diameter segment.

Visualize: We will denote all quantities for the 1.0-mm-diameter wire with the subscript 1, and all quantities for the 2.0-mm-diameter wire with the subscript 2.

Solve: Equation 30.13 is $J = nev_d$. This means the current densities in the two segments are

$$J_1 = nev_{d1} \quad J_2 = nev_{d2}$$

Dividing these equations, we get $v_{d2} = (J_2/J_1)v_{d1}$. Because current is conserved, $I_1 = I_2 = 2.0 \text{ A}$. So,

$$\frac{J_2}{J_1} = \frac{I_2/A_2}{I_1/A_1} = \frac{A_1}{A_2} \Rightarrow v_{d2} = \frac{A_1}{A_2} v_{d1} = \left(\frac{D_1}{D_2} \right)^2 v_{d1} = \left(\frac{1.0 \text{ mm}}{2.0 \text{ mm}} \right)^2 (2.0 \times 10^{-4} \text{ m/s}) = 5.0 \times 10^{-5} \text{ m/s}$$

Assess: A drift velocity which is small and only $\left(\frac{1}{4}\right)$ of the drift velocity in the 1.0-mm-diameter wire is reasonable.

30.56. Model: Because current is conserved, the current in the 3.0-mm-diameter end of the wire is the same as in the current in the 1.0-mm-diameter end of the wire.

Visualize: We will denote all quantities for the 1.0-mm-diameter end of the wire with the subscript 1, and all quantities for the 3.0-mm-diameter end of the wire with the subscript 3.

Solve: Equation 30.13 is $J = nev_d$. This means the current densities at the two ends are

$$J_1 = nev_{d1} \quad J_3 = nev_{d3}$$

Dividing these equations, we obtain $v_{d3} = (J_3/J_1)v_{d1}$. Because current is conserved, $I_1 = I_3$. So,

$$v_{d3} = \frac{I_3/A_3}{I_1/A_1} v_{d1} = \frac{A_1}{A_3} v_{d1} = \left(\frac{D_1}{D_3} \right)^2 v_{d1} = \left(\frac{1.0 \text{ mm}}{3.0 \text{ mm}} \right)^2 (0.50 \times 10^{-4} \text{ m/s}) = 5.6 \times 10^{-6} \text{ m/s}$$

Assess: The smallness of the drift velocity is physically reasonable.

30.57. Model: Because current is conserved, the currents in the aluminum and the nichrome segments of the wire are the same.

Solve: From Equations 30.13 and 30.17 we have $J = I/A = \sigma E$. This means

$$E = \frac{I}{A\sigma} \Rightarrow \frac{E_{\text{nichrome}}}{E_{\text{aluminum}}} = \left(\frac{I_{\text{nichrome}}}{I_{\text{aluminum}}} \right) \left(\frac{A_{\text{aluminum}}}{A_{\text{nichrome}}} \right) \left(\frac{\sigma_{\text{aluminum}}}{\sigma_{\text{nichrome}}} \right) = \left(\frac{D_{\text{aluminum}}^2}{D_{\text{nichrome}}^2} \right) \left(\frac{\sigma_{\text{aluminum}}}{\sigma_{\text{nichrome}}} \right)$$

where we used the conservation of current and $A = \pi/4 D^2$. For $E_{\text{nichrome}} = E_{\text{aluminum}}$, the above equation simplifies to

$$D_{\text{nichrome}} = \sqrt{\frac{\sigma_{\text{aluminum}}}{\sigma_{\text{nichrome}}}} D_{\text{aluminum}} = \sqrt{\frac{3.5 \times 10^7 \Omega^{-1} \text{m}^{-1}}{6.7 \times 10^5 \Omega^{-1} \text{m}^{-1}}} (1.0 \text{ mm}) = 7.2 \text{ mm}$$

30.58. Model: Electric current is conserved.

Visualize: For the top, middle, and bottom segments the subscripts “top,” “mid,” and “bot” are used.

Solve: (a) Since current is conserved, $I_{\text{top}} = I_{\text{mid}} = I_{\text{bot}} = 10 \text{ A}$.

(b) The current density is $J = I/A = I/\pi R^2$. Thus,

$$J_{\text{top}} = J_{\text{bot}} = \frac{10 \text{ A}}{\pi(0.001 \text{ m})^2} = 3.18 \times 10^6 \text{ A/m}^2 \quad J_{\text{mid}} = \frac{10 \text{ A}}{\pi(0.0005 \text{ m})^2} = 1.27 \times 10^7 \text{ A/m}^2$$

(c) The electric field is $E = J/\sigma$. Thus,

$$E_{\text{top}} = E_{\text{bot}} = \frac{J_{\text{top}}}{\sigma} = \frac{3.18 \times 10^6 \text{ A/m}^2}{3.5 \times 10^7 \Omega^{-1} \text{m}^{-1}} = 0.0909 \text{ V/m} \quad E_{\text{mid}} = \frac{J_{\text{mid}}}{\sigma} = \frac{1.27 \times 10^7 \text{ A/m}^2}{3.5 \times 10^7 \Omega^{-1} \text{m}^{-1}} = 0.364 \text{ V/m}$$

(d) The drift speed is $v_d = J/ne$. Thus

$$(v_d)_{\text{top}} = (v_d)_{\text{bot}} = \frac{J_{\text{top}}}{ne} = \frac{3.18 \times 10^6 \text{ A/m}^2}{(6.0 \times 10^{28} \text{ m}^{-3})(1.60 \times 10^{-19} \text{ C})} = 3.31 \times 10^{-4} \text{ m/s}$$

$$(v_d)_{\text{mid}} = \frac{J_{\text{mid}}}{ne} = \frac{1.27 \times 10^7 \text{ A/m}^2}{(6.0 \times 10^{28} \text{ m}^{-3})(1.60 \times 10^{-19} \text{ C})} = 1.33 \times 10^{-3} \text{ m/s}$$

(e) The electron current is $i = N_e/\Delta t = I/e$. Because $I_1 = I_2 = I_3 = 10 \text{ A}$,

$$\left(\frac{N_e}{\Delta t} \right)_{\text{top}} = \left(\frac{N_e}{\Delta t} \right)_{\text{mid}} = \left(\frac{N_e}{\Delta t} \right)_{\text{bot}} = \frac{10 \text{ A}}{1.60 \times 10^{-19} \text{ C}} = 6.25 \times 10^{19} \text{ s}^{-1}$$


Quantity	Top	Middle	Bottom
I	10 A	10 A	10 A
J	$3.2 \times 10^6 \text{ A/m}^2$	$1.27 \times 10^7 \text{ A/m}^2$	$3.27 \times 10^6 \text{ A/m}^2$
E	0.091 V/m	0.36 V/m	0.091 V/m
v_d	$3.3 \times 10^{-4} \text{ m/s}$	$1.33 \times 10^{-3} \text{ m/s}$	$3.3 \times 10^{-4} \text{ m/s}$
τ	$2.1 \times 10^{-14} \text{ s}$	$2.1 \times 10^{-14} \text{ s}$	$2.1 \times 10^{-14} \text{ s}$
i	$6.3 \times 10^{19} \text{ s}^{-1}$	$6.3 \times 10^{19} \text{ s}^{-1}$	$6.3 \times 10^{19} \text{ s}^{-1}$

30.59. Solve: From Equation 30.17 and Table 30.2, the electric field is

$$E = \frac{J}{\sigma} = \frac{I}{\sigma A} = \frac{5.0 \text{ A}}{(1.0 \times 10^7 \Omega^{-1} \text{ m}^{-1}) \pi (1.0 \times 10^{-3} \text{ m})^2} = 0.16 \text{ V/m}$$

30.60. Model: Assume the battery is ideal.

Visualize:



Solve: The tube's resistance is

$$R = \frac{\rho L}{A} = \frac{\rho L}{\pi(r_2^2 - r_1^2)} = \frac{(1.5 \times 10^{-6} \Omega \text{ m})(0.20 \text{ m})}{\pi[(0.0015 \text{ m})^2 - (0.0014 \text{ m})^2]} = 0.329 \Omega$$

When connected to the battery, $\Delta V_{\text{tube}} = \Delta V_{\text{bat}} = 3.0 \text{ V}$. Thus, the current is

$$I = \frac{\Delta V_{\text{tube}}}{R} = \frac{3.0 \text{ V}}{0.329 \Omega} = 9.1 \text{ A}$$


30.61. Model: Assume the resistors are ohmic.

Solve: The potential difference across the resistor on the left is \mathcal{E} , so the current in it is $I = \mathcal{E}/R$. The potential difference across the resistor on the right is $2\mathcal{E}$. For the current to be the same in that resistor, the resistance must be twice as much, so that $I = 2\mathcal{E}/(2R)$. Therefore, the resistance of the resistor on the right is $2R$.

Assess: The two resistors are neither in parallel nor in series.

30.62. Model: Assume the battery is ideal.

Visualize: The current supplied by the battery and passing through the wire is $I = \Delta V_{\text{bat}}/R$. A graph of current versus time has exactly the same shape as the graph of ΔV_{bat} with an initial value of $I_0 = (\Delta V_{\text{bat}})_0/R = (1.5 \text{ V})/(3.0 \Omega) = 0.50 \text{ A}$. The horizontal axis has been changed to seconds.

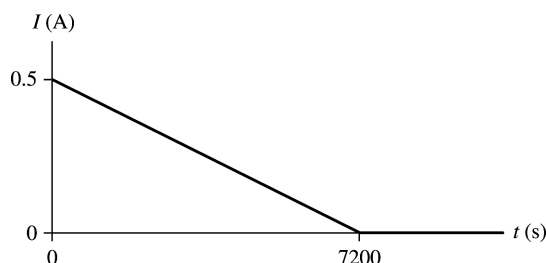

Solve: Current is $I = dQ/dt$. Thus the total charge supplied by the battery is

$$Q = \int_0^{\infty} I dt = \text{area under the current-versus-time graph} \\ = \frac{1}{2}(7200 \text{ s})(0.50 \text{ A}) = 1.80 \times 10^3 \text{ C}$$

30.63. Model: The charged metal plates form a parallel-plate capacitor.

Solve: (a) When the charged plates are connected, the maximum current in the wire can be obtained from $I_{\max} = \Delta V_{\max}/R$ where ΔV_{\max} is the potential difference across the capacitor just before the wire is connected. ΔV_{\max} for the capacitor is $\Delta V_{\max} = Q/C$, where C is the capacitance for a parallel-plate capacitor. Noting that $C = \epsilon_0 A/d$ and $R = \rho L/\pi r^2$, the maximum current is

$$\begin{aligned} I_{\max} &= \frac{\Delta V_{\max}}{R} = \frac{Q}{CR} = \frac{Q}{(\epsilon_0 A/d)(\rho L/\pi r^2)} = \frac{Q}{\epsilon_0 \rho} \frac{\pi r^2}{A} \\ &= \frac{(12.5 \times 10^{-9} \text{ C})\pi(0.112 \times 10^{-3} \text{ m})^2}{(8.85 \times 10^{-12} \text{ C}^2/\text{N m}^2)(1.7 \times 10^{-8} \text{ } \Omega \text{ m})\pi(5.0 \times 10^{-2} \text{ m})^2} = 4.2 \times 10^5 \text{ A} \end{aligned}$$

In the above calculations, note that the length of the wire L is the same as the separation of the two plates d . Also, the resistivity of copper is taken from Table 30.2.

(b) The current I will decrease in time. As charge leaves one plate and moves to the other plate, the voltage across the capacitor and hence the current goes down.

(c) The energy dissipated in the wire is the energy present in the capacitor before it was connected with the wire. This energy is

$$U_{\text{dissipated}} = \frac{1}{2} \frac{Q^2}{C} = \frac{1}{2} Q \frac{Q}{C} = \frac{1}{2} Q \Delta V_{\max} = \frac{1}{2} (12.5 \times 10^{-9} \text{ C})(1800 \text{ V}) = 1.1 \times 10^{-5} \text{ J}$$

30.64. Model: The volume of the wire remains constant as it is stretched. The cross-sectional area of the wire changes uniformly as it stretches.

Solve: The resistance of the wire before it is stretched is

$$R = \frac{\rho L}{A} = \frac{\rho L^2}{AL} = \frac{\rho L^2}{V}$$

The volume V remains constant as the wire is stretched. After stretching, the resistance is

$$R' = \frac{\rho L'^2}{V}$$

Taking the ratio of these two equations and using the fact that ρ is a property of the material and therefore does not change,

$$\frac{R}{R'} = \frac{L^2}{L'^2} = \frac{L^2}{(2L)^2} = \frac{1}{4} \Rightarrow R' = 4R$$

The wire's resistance is $4R$.

Assess: Stretching a wire increases the one dimension of length but decreases the two dimensions of cross-sectional area, so the resistance increases.

30.65. Model: The wire is uniform. The electric field in the wire is the negative of the slope of the V vs. s curve.

Solve: The electric field in the wire is

$$E = -\frac{\Delta V}{\Delta s} = -\frac{(3.0 \text{ V} - 0.0 \text{ V})}{(0.30 \text{ m} - 0.0 \text{ m})} = -10 \text{ V/m}$$

The negative sign indicates the electric field direction is along the negative s direction, and is not needed to find current density. From Table 30.2, the conductivity of tungsten is $\sigma = 1.8 \times 10^7 \text{ } \Omega^{-1} \text{ m}^{-1}$. Thus the current density in the wire is

$$J = \sigma E = (1.8 \times 10^7 \text{ } \Omega^{-1} \text{ m}^{-1})(10 \text{ V/m}) = 1.8 \times 10^8 \text{ A/m}^2$$

30.66. Model: The copper wire is uniform.

Solve: Equation 30.21 relates the current in a wire to the potential difference across it:

$$I = \frac{A}{\rho L} \Delta V \Rightarrow \Delta V = \frac{\rho LI}{A} = \frac{(1.7 \times 10^{-8} \Omega \text{m})(20 \text{ m})(8.0 \text{ A})}{\pi(1.0 \times 10^{-3} \text{ m})^2} = 0.87 \text{ V}$$

The resistivity ρ of copper is taken from Table 30.2.

Assess: While voltage drops in household wires are small compared to the applied voltage, voltage drops in transmission wires between homes and power plants could be quite large. The power company transports energy in a way that minimizes the voltage drop, as we will learn in a later chapter.

30.67. Solve: (a) The charge delivered is

$$(50 \times 10^3 \text{ A})(50 \times 10^{-6} \text{ s}) = 2.5 \text{ C.}$$

(b) The current in the lightning rod and the potential drop across it are related by Equation 30.21. Using ρ for iron from Table 30.2,

$$I = \frac{A}{\rho L} \Delta V \Rightarrow A = \frac{\rho LI}{\Delta V} = \frac{(9.7 \times 10^{-8} \Omega \text{m})(5.0 \text{ m})(50 \times 10^3 \text{ A})}{100 \text{ V}} = 2.43 \times 10^{-4} \text{ m}^2$$

This is the area required for a maximum voltage drop of 100 V. The corresponding diameter of the lightning rod is

$$d = 2r = 2\sqrt{\frac{A}{\pi}} = 2\sqrt{\frac{2.43 \times 10^{-4} \text{ m}^2}{\pi}} = 1.8 \times 10^{-2} \text{ m} = 1.8 \text{ cm}$$

30.68. Model: Assume both muscle and fat are ohmic.

Visualize: The resistivity of the whole leg will be a weighted average of the resistivities of muscle and fat.

Solve:

$$I = \frac{\Delta V}{R} = \frac{\Delta V}{\frac{\rho L}{A}} = \frac{A \Delta V}{(L)(0.82 \rho_{\text{muscle}} + 0.18 \rho_{\text{fat}})} = \frac{\pi(0.060 \text{ m})^2(1.5 \text{ V})}{(0.40 \text{ m})[0.82(13 \Omega \text{m}) + 0.18(25 \Omega \text{m})]} = 2.8 \text{ mA}$$

Assess: This is not the same as treating the system as two resistors (one made of muscle and the other of fat) in parallel; the muscle and fat are mixed together, not separate side by side.

30.69. Solve: The total charge delivered by the battery is


$$\begin{aligned} Q &= \int dQ = \int_0^{\infty} I dt = \int_0^{\infty} (0.75 \text{ A}) e^{-t/(6 \text{ hours})} dt = (0.75 \text{ A})(-6 \text{ hours}) \left[e^{-t/(6 \text{ hours})} \right]_0^{\infty} \\ &= (0.75 \text{ A})(6 \times 3600 \text{ s}) = 1.62 \times 10^4 \text{ C} \end{aligned}$$

The number of electrons transported is

$$\frac{1.62 \times 10^4 \text{ C}}{1.6 \times 10^{-19} \text{ C}} = 1.01 \times 10^{23}$$

30.70. Model: Use the calculation of the electric field of a ring of charge from Chapter 27.

Visualize:

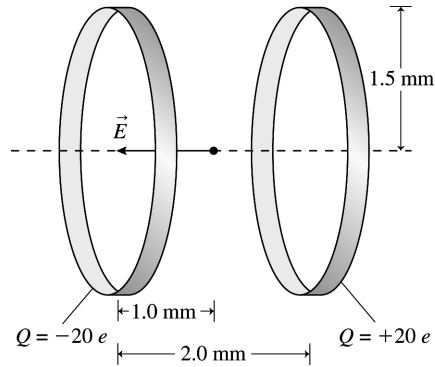

Both the rings contribute equally to the field strength. The radius of each ring is $R = 1.5$ mm. The left ring is negatively charged and the right ring is positively charged because 20 electrons have been transferred from the right ring to the left ring.

Solve: From Chapter 27, the electric field of a ring of charge $+Q$ at $z = -1.0$ mm on the axis where the axis of each ring is \hat{k} is

$$\begin{aligned}\vec{E}_+ &= \frac{1}{4\pi\epsilon_0} \frac{zQ}{(z^2 + R^2)^{3/2}} \hat{k} = (9 \times 10^9 \text{ N m}^2/\text{C}^2) \frac{(-1.0 \times 10^{-3} \text{ m})(20 \times 1.6 \times 10^{-19} \text{ C})}{\left[(-1.0 \times 10^{-3} \text{ m})^2 + (1.5 \times 10^{-3} \text{ m})^2\right]^{3/2}} \hat{k} \\ &= -4.92 \times 10^{-3} \hat{k} \text{ V/m}\end{aligned}$$

The left ring with charge $-Q$ makes an equal contribution


$$\begin{aligned}\vec{E}_- &= -4.92 \times 10^{-3} \hat{k} \text{ V/m} \\ \Rightarrow \vec{E}_{\text{net}} &= \vec{E}_+ + \vec{E}_- = -9.84 \times 10^{-3} \hat{k} \text{ V/m}\end{aligned}$$

The negative sign with E_+ , E_- , and E_{net} means these electric fields are in the $-z$ direction. Using $J = I/A = \sigma E$, the current is

$$I = \pi(1.5 \times 10^{-3} \text{ m})^2 (3.5 \times 10^7 \text{ } \Omega^{-1} \text{ m}^{-1})(9.84 \times 10^{-3} \text{ V/m}) = 2.4 \text{ A}$$

Assess: This result is consistent with the value given in Table 26.1 for the electric field strength in a current-carrying wire.

30.71. Visualize:



The current density in the beam increases with distance from the center. We consider a thin circular shell of width dr at a distance r from the center to calculate the current density at the edge.

Solve: (a) The beam current is 1.5 mA. This means the beam transports a charge of 1.5×10^{-3} C in 1 s. The number of protons delivered in 1 second is

$$\frac{1.5 \times 10^{-3} \text{ C}}{1.6 \times 10^{-19} \text{ C}} = 9.375 \times 10^{15} = 9.4 \times 10^{15}$$

(b) From $J = I/A$, the current in the ring of width dr at a distance r from the center is

$$dI = JdA = J_{\text{edge}} \left(\frac{r}{R} \right) (2\pi r dr) = J_{\text{edge}} \frac{2\pi r^2 dr}{R}$$

The total current $I = 1.5$ mA is found by integrating this expression:

$$I_{\text{total}} = \int dI = 1.5 \times 10^{-3} \text{ A} = \frac{J_{\text{edge}}}{R} \int_0^R 2\pi r^2 dr = \frac{2\pi J_{\text{edge}} R^2}{3}$$

$$\Rightarrow J_{\text{edge}} = (1.5 \times 10^{-3} \text{ A}) \frac{3}{2\pi (2.5 \times 10^{-3} \text{ m})^2} = 115 \text{ A/m}^2$$

30.72. Solve: (a) The charge Q experiences a change of the potential ΔV_{bat} as it passes through the wire. Thus

$$\Delta U = Q\Delta V_{\text{bat}}$$

(b) The energy lost by the charge is transformed into internal energy of the wire—the wire is heated.

(c) The power supplied by the battery is


$$P = \frac{\Delta U}{\Delta t} = \frac{Q}{\Delta t} \Delta V_{\text{bat}} = I\Delta V_{\text{bat}}$$

(d) The power supplied is

$$P = (1.2 \text{ A})(1.5 \text{ V}) = 1.8 \text{ W}$$

30.73. Model: The currents in the two segments of the wire are the same.

Visualize: The electric fields \vec{E}_1 and \vec{E}_2 point in the direction of the current. Establish a cylindrical Gaussian surface with end area a that extends into both segments of the wire.

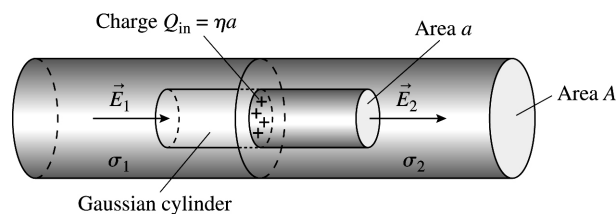

Solve: (a) Because current is conserved, $I_1 = I_2 = I$. The cross-section areas of the two wires are the same, so the current densities are the same: $J_1 = J_2 = I/A$. Thus the electric fields in the two segments have strengths

$$E_1 = \frac{J_1}{\sigma_1} = \frac{I}{A\sigma_1} \quad E_2 = \frac{J_2}{\sigma_2} = \frac{I}{A\sigma_2}$$

The electric field enters the Gaussian surface on the left (negative flux) and exits on the right. No flux passes through the wall of cylinder, so the net flux is $\Phi_e = E_2 a - E_1 a$. The Gaussian cylinder encloses charge $Q_{\text{in}} = \eta a$ on the boundary between the segments. Gauss's law is

$$\Phi_e = \frac{Q_{\text{in}}}{\epsilon_0} \Rightarrow E_2 a - E_1 a = \frac{Ia}{A} \left(\frac{1}{\sigma_2} - \frac{1}{\sigma_1} \right) = \frac{\eta a}{\epsilon_0}$$

Thus the surface charge density on the boundary is

$$\eta = \frac{\epsilon_0 I}{A} \left(\frac{1}{\sigma_2} - \frac{1}{\sigma_1} \right)$$

(b) From the expression obtained in part (a)

$$\eta = \frac{Q}{\pi R^2} = \frac{I \epsilon_0}{(\pi R^2)} \left(\frac{1}{\sigma_{\text{iron}}} - \frac{1}{\sigma_{\text{copper}}} \right)$$
$$\Rightarrow Q = (5 \text{ A})(8.85 \times 10^{-12} \text{ C}^2/\text{Nm}^2) \left(\frac{1}{1.0 \times 10^7 \Omega^{-1}\text{m}^{-1}} - \frac{1}{6.0 \times 10^7 \Omega^{-1}\text{m}^{-1}} \right) = 3.7 \times 10^{-18} \text{ C}$$

Assess: This charge corresponds to a deficit of a mere 23 electrons on the boundary between the metals.